
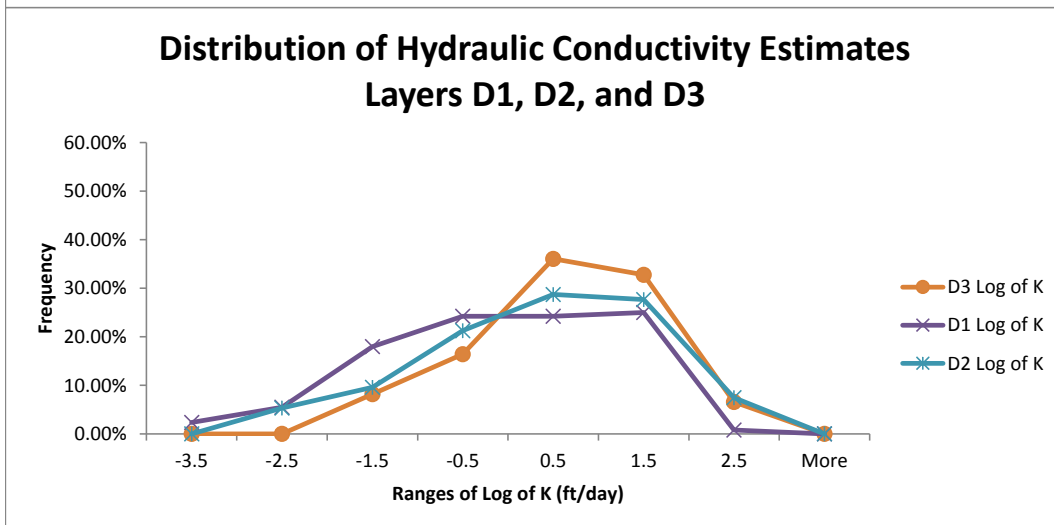


**Table 2**  
**Summary of Hydraulic Conductivity Estimates**  
**Hoffmann-La Roche Inc. - Nutley, NJ**

Hydraulic Conductivity K [ft/day]	Layer S1	Layer S2	Layer S3	Layer D1	Layer D2	Layer D3
Mean	2.91	2.67	6.65	3.29	7.75	10.44
Geometric Mean	1.11	1.10	0.83	0.25	0.73	1.60
Standard Deviation	3.97	3.54	19.70	6.69	15.59	30.99
Standard Deviation of Log Transform	0.68	0.68	1.16	1.32	1.26	1.03
Minimum	0.03	0.00400	0.00006	0.00002	0.00	0.01
Maximum	18.95	20.59	155.29	49.06	82.55	231.00
Number of Estimates	141	157	148	128	94	61

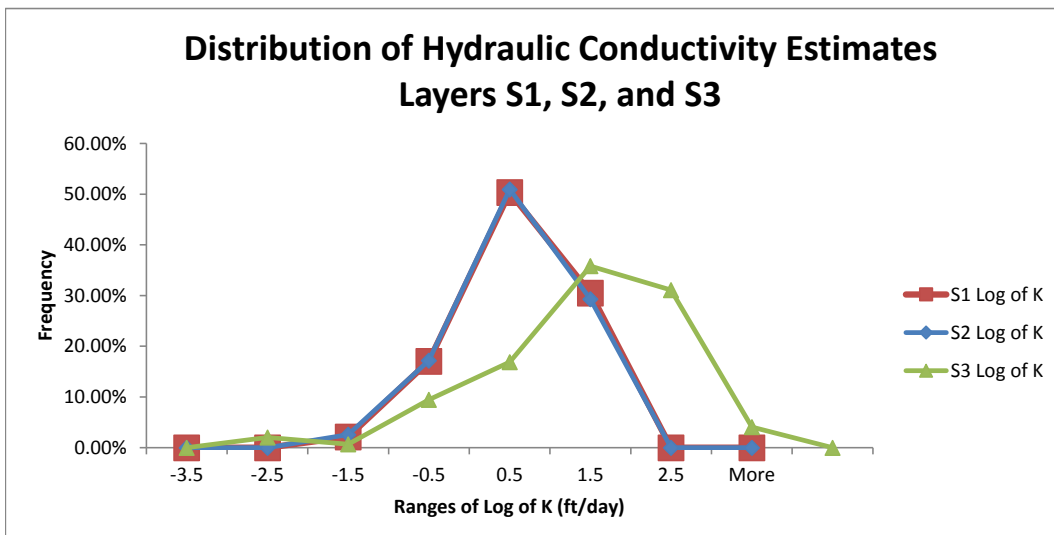

Prepared by: K. Quinn 8/15/14  
 Checked by J. Rice 10/9/14